

①

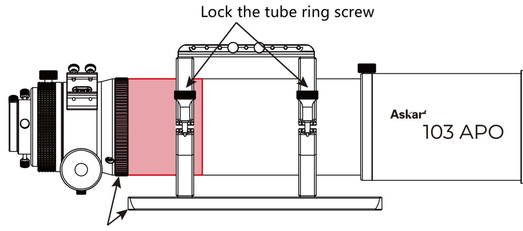


The focuser needs to be positioned beyond the dovetail plate

Adjust the tube ring to the position shown


②

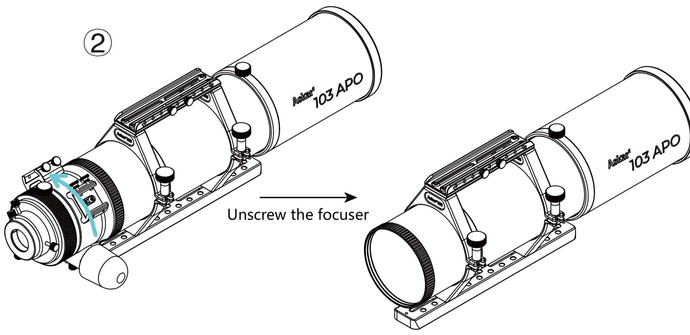


③

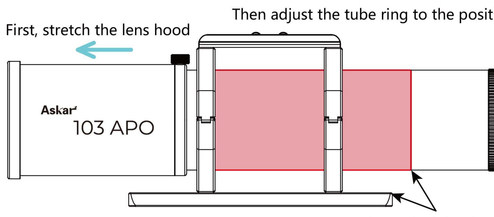

④

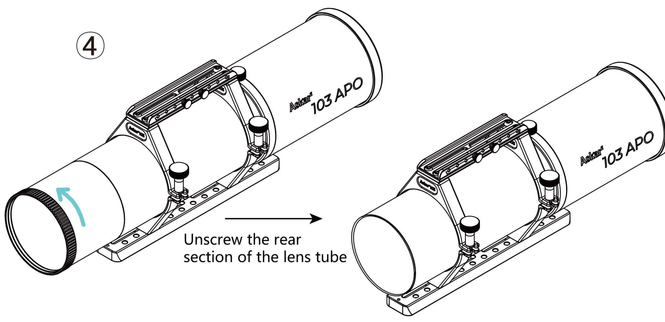


⑤

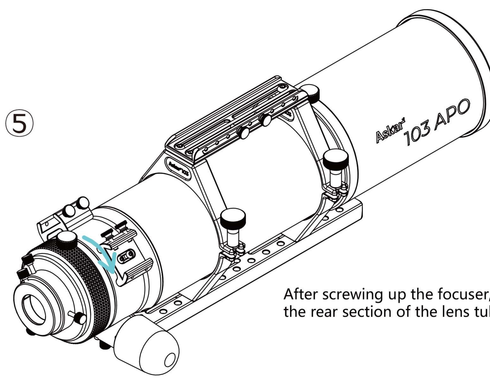


After screwing up the focuser, the rear section of the lens tube is removed

⑥

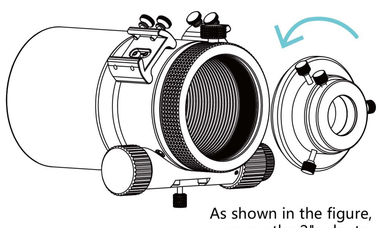

As shown in the figure, unscrew the 2" adapter and the 1.25" adapter

⑦

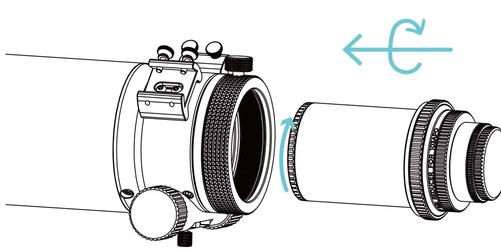

Unscrew the dust cap of the accessories and screw it into the 103APO