


PD Hub Power Box

Quick Start Guide

v1.0

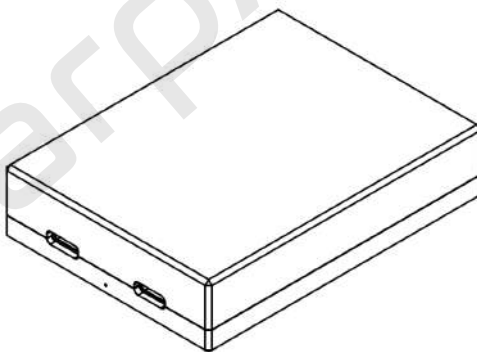

(For latest version, please visit <https://www.warpastron.com>)

Safety Precautions



Welcome to use PD Hub Power Box

Before using this product, please carefully read safety precautions and visit <https://www.warpastron.com> for the "User Guide" and related documents.

Safety precautions are in place to protect your personal safety and property. Users should read and fully understand the safety precautions before performing any operations.



WARNING

Failure to follow these instructions may result in serious injury, electric shock, fire, or product damage.

- Do not handle or connect the power cable with wet hands, as this may result in electric shock.
- Do not pull, twist, or excessively bend the power cable. Ensure the cable insulation is intact before use to prevent short circuits, fire, or electric shock.
- Do not use the device in wet or rainy environments.
- Keep this product out of reach of children. This product contains small parts that may pose a choking hazard if swallowed.
- Children under 12 years of age must not use this product. Minors under 18 years of age should only operate the device under adult supervision.
- Do not disassemble or modify this device without authorization. Unauthorized modification may result in product damage and will void the warranty.





CAUTION

Failure to follow these instructions may result in equipment malfunction or minor injury.

- If the device becomes abnormally hot, emits smoke, or produces unusual odors during operation, immediately disconnect the power supply and contact customer support.
- Ensure the power source complies with the USB-C Power Delivery (PD) protocol before connecting the device.
- Inspect all cables and connectors for damage before use.
- The DC ports are output-only. Do not connect any external power source to the DC output ports.
- If the device will not be used for an extended period, store it indoors in a dry environment to prevent moisture-related damage.

Power Connection

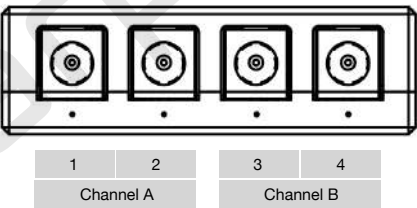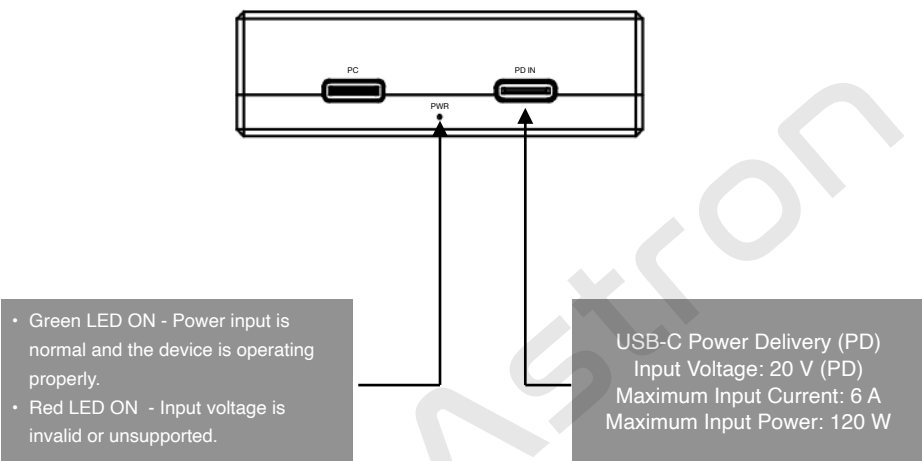


Channel	Voltage	Max Current
Channel A	5~19 V (12 V default)	5A
Channel B	5~19 V (12 V default)	5A

LED Color	Status	Output Voltage
Green	ON	≤ 9 V
Blue	ON	9 - 14 V
Orange	ON	14 - 19 V

Note: 1. Maximum Current per Port: 5 A. 2. The red LED blinks when protection is activated.

Mounting

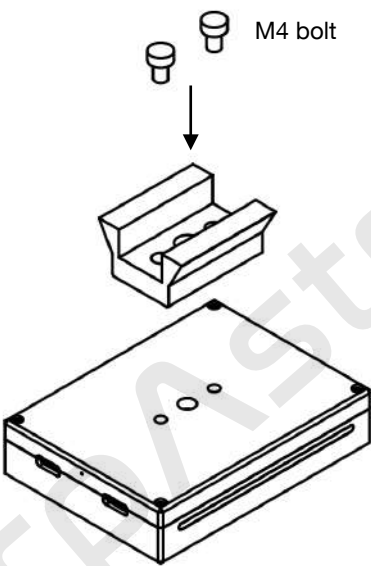

The screw insertion depth into the power box must not exceed 3 mm.
Exceeding this limit may damage the internal circuit board.