



SUZHOU ZWO CO., LTD.



ZWO 风扇更换技术参考手册

ZWO How to replace Fan reference manual

文档编号: ZW1803080ACSC

ZWO Co., Ltd.

Phone: +86 512 65923102

Web: <http://www.zwoptical.com>



SUZHOU ZWO CO., LTD.



版权所有 © 苏州市振旺光电有限公司 2015-2035。保留一切权利。

非经本公司许可，任何组织和个人不得擅自摘抄、复制本文档内容的部分或者全部，并不得以任何形式传播。

注意

由于产品版本升级或其他原因，本文档内容会不定期进行更新。除非另有约定，本文档仅作为使用指导，本文档中的所有陈述、信息和建议不构成任何明示或暗示的担保。

Copyright © ZWO Co., Ltd. 2015–2025. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of ZWO Co., Ltd

Note

Due to product version upgrades or other reasons, the contents of this document are not regularly updated. Unless otherwise agreed, this document is intended as a guide only and all statements, information and recommendations in this document do not constitute any guarantee, expressed or implied.




SUZHOU ZWO CO., LTD.



Chapter 1: FAN

FAN: It is maglev fan, Low noise, low vibration, long service life. Speed is 4500 r/min.



Chapter 2: How to make it

2.1 Remove the back panel.


Unscrew the four protruding screws from the back cover with the appropriate screwdriver.



Remove the screw and gasket.




Unplug the fan from the main board.

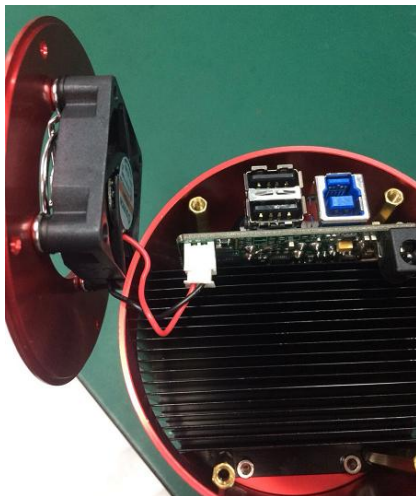

2.2 Remove the old fan from the back panel



SUZHOU ZWO CO., LTD.



Screw off the other four screws on the back cover with a screwdriver.



2.3 Installation of a new fan.


The fixings you need when you install the new fan.




Please find a hard platform and put it on the table. Like a book with a hard cover, or our packing box. Then put the back panel on it. No word surface is placed upward.




Insert four screws from the bottom into the screw hole.



Place the safety net on the screws. The convex surface is going down.

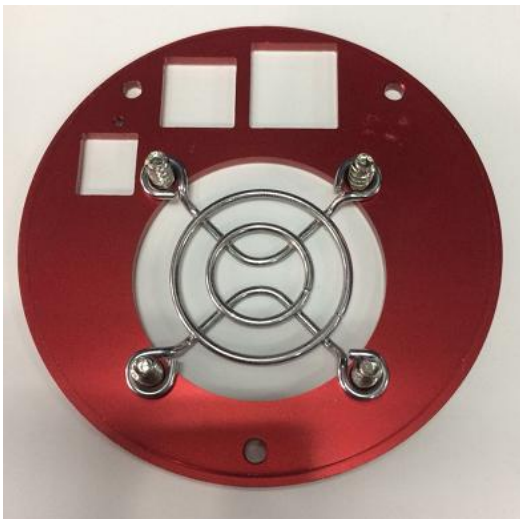


Place four spacers.

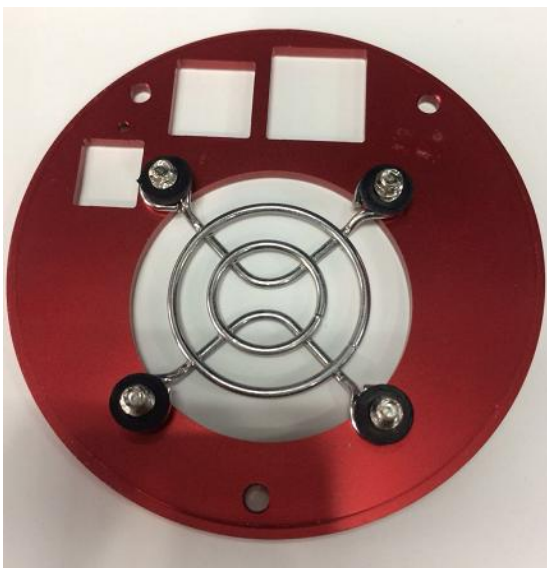



SUZHOU ZWO CO., LTD.



Place the new fan. Attention: The fan has a direction. The surface of the text needs to be up. Also note the relative position of the wire and the hole.




Hold the fan in one hand, hold the platform in the other hand, turn them over and put them on the table. Then Remove the platform.



Screw the 4 screws down.





2.4 Put back the back cover with the new fan.

In the order of disassembly, reverse the operation, and then put back the back cover.

Attention:

- 1, Do not forget to plug the fan.
- 2, The gasket is in a direction, and incorrect installation may result in cutting yourself in use.
- 3, Please make sure that all of them are very tight.



SUZHOU ZWO CO., LTD.



Chapter 3: After done

Test the fan. If it does not work, please reconnect the fan.



SUZHOU ZWO CO., LTD.



Chapter 4: Get support

Please send email to info@zwoptical.com for more information.